


Audrey

A7 Series

Price Checker Terminal

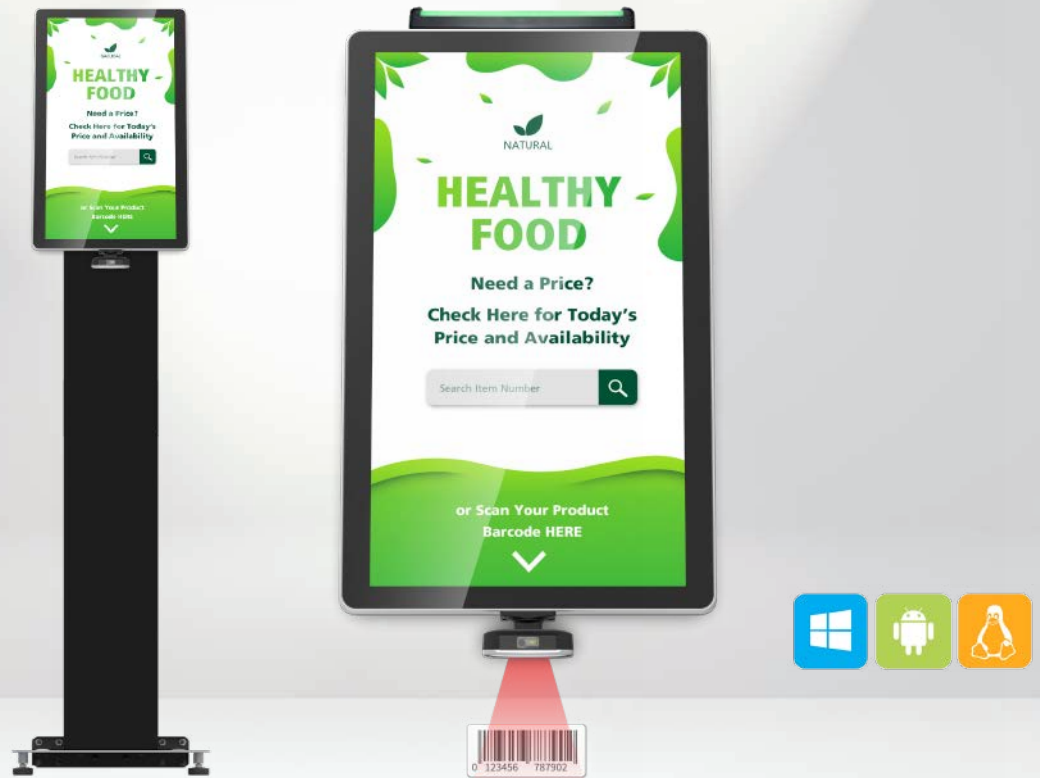

FEATURES

- Large, vibrant 21.5" PCAP touch display
- 2D imager for scanning of barcodes
- VESA wall mount
- High-performance CPU with fanless design
- Front panel IP65, entire terminal IP54
- Supports Windows, Linux Ubuntu, Android
- Modular design with optional EMV reader, status light, NFC/RFID reader

Price Checker Terminal



Item	A7-1-AL	A7-1-E	A7-1-R
Size	21.5"		
Aspect Ratio	16:9		
Resolution	1920 x 1080		
Brightness	300 nits		
Touch	PCAP touch		
CPU	Alder Lake-P Intel® Celeron® 7305 Intel® Core™ i3-1215U Intel® Core™ i5-1245U, vPro Intel® Core™ i7-1265U, vPro	Elkhart Lake Intel® Celeron® J6412	Rockchip RK3399
Memory	DDR4 4GB, 8GB, 16GB, 32GB		LDDR4 4GB
Storage	M.2 PCIe SSD: 128GB / 256GB / 512GB		eMMC 32GB + micro SD card slot (up to 128GB)
I/O Interfaces	3 x serial ports, RS-232 (RJ45), 0V/5V/12V selected in BIOS (COM1, COM2, COM3)		2 x serial ports, RS-232 (RJ45), 0V/5V/12V selected in setting (COM1, COM2)
	1 x Intel LAN (IEEE 802.3 10/100/1000 Mbps)	1 x LAN (IEEE 802.3 10/100/1000 Mbps)	
	1 x RJ11 port support for 2 cash drawers with 24V/12V jumper setting		
	1 x DC + 12V out		
	4 x USB 3.2 + 2 x USB 2.0	3 x USB 3.2 + 3 x USB 2.0	1 x USB 3.0 (OTG) + 5 x USB 2.0
	1 x DC + 12V input		
	1 x audio (1 x line-out)		
	1 x HDMI		
	1 x Type-C (data transfer + display)		1 x micro SD card
	Speaker	1 x speaker (3W)	
Barcode Scanner	2D barcode imager with adjustable reading angle		
Installation	Standard VESA wall mount (floor stand & desktop stand are also available)		
Peripheral Options	MSR, EMV reader, fingerprint reader, RFID/NFC, status light, handheld scanner, camera, printer		
Wireless (option)	Wi-Fi 6E Intel AX210, IEEE 802.11 a/b/g/n/acR2/axR2 BT 5.2		
Spill & Dust Resistant	Whole unit IP54 certified, front panel IP65-rated		
Operating System	Windows 11 IoT Enterprise GAC (64bit) ready		Android 11
	Windows 10 IoT Enterprise LTSC 21H2 (64bit)		
	Linux Ubuntu 22.04		
TPM & vPro	Intel vPro (i5/i7 CPU only)		n/a
	S/W TPM 2.0 (BIOS)		
Power Adaptor	AC-In 100~240V	AC-In 100~240V	AC-In 100~240V
	DC-Out 12V, 120W	DC-Out 12V, 90W / 120W	DC-Out 12V, 90W
Reliability	System operating temperature: 0~40°C / 32~104°F		
	System humidity: 15% ~ 80%		
	Storage temperature: -20~60°C / -4~140°F		
Dimensions (W x H x D)	20.54 x 12.75 x 1.87 inch 521.74 x 323.74 x 47.5 mm (without base and barcode scanner)		
Weight	19.4 lb / 8.8 kg (without base & camera)		

*Specification is subject to change without prior notice

Contact US

Partner Tech USA Inc.
1255 N. Patt Street
Anaheim, CA 92801
Phone: 949-598-1888
sales@partnertechcorp.com

Partner Tech Mexico & Latin America
Blvd. Palmas Hills 1, Piso 8, Valle de las Palmas, Huixquilucan
Ciudad de México, 52764, Mexico
Phone: 949-598-1888
info@partnertechcorp.com

